

Technical Data Sheet

VSF-0-05

General Description

- Daylight and ultra-violet responsive solid state fluorescent yellow pigment for outdoor applications with exceptional lightfastness.

Applications

- Outdoor applications where high lightfastness is required
 - 2K Urethane coatings & nitrocellulose lacquers
 - Solvent based paints
 - Water based paints
- The suitability in plastics is not recommended.

Product Features

- VSF-0-05 should be dispersed in the final application.
- The pigment is stabilized preventing the formation of agglomerates. Stirred in at the final stages of the dispersion process: no need for expensive and time-consuming milling machinery.
- Due to the nature of this pigment and production methods, the particle size distribution is extremely narrow.
- Exhibiting the same lightfastness as conventional yellow pigments.
- A clear topcoat has a positive impact on the long-term durability (ΔE).

Standard Color

Product Name	Description
VSF-0-05	Lightfast Yellow
Packaging: 1 box = 20kg MOQ = 20kg	
Storage & shelf life: 120 months after production date when kept in closed original packaging in a dry place at ambient temperature.	
Safety & regulatory: Safety Data Sheet available on request.	

Physical properties	
Appearance	Yellow Powder (greenish)
Hue under UV light	Bright Yellow (greenish)
Bulking density	0.25 g/cm ³
Density	1.7
Particle size D ₅₀	1 - 2 μ m
Lightfastness	7-8 BWS

(1) Test methods and Certificate of Analysis (COA) available on request.

Bleeding data

Solvent	B
Butyl acetate	3
MEK	3
Xylene	2
White spirits	4
Butanol	4

Test method bleeding (B):

0.2 gram of pigment dispersed in 20 ml of solvent; shaken mechanically for 30 min on a flask shaker and filtered. The clear filtrate is observed for the degree of bleeding on a 1 to 5 scale. The higher the number (5) the better.

Disclaimer: Our technical advice, information, statements, whether given verbally, in writing, or in the form of test results, is offered for your guidance without warranty. No warranty for fitness for a particular purpose is made. This also applies where protective rights of third parties are involved. It does not release the user from obligation to test the suitability of the products and formulas for the intended process and applications. Our guarantee is limited to the consistent quality of our product.

Technical Data Sheet

VSF-0-05
Fastness to acid/alkali

Acid (5% HCl)	5
Alkali (5% NaOH)	5

Test method fastness to acid/alkali:

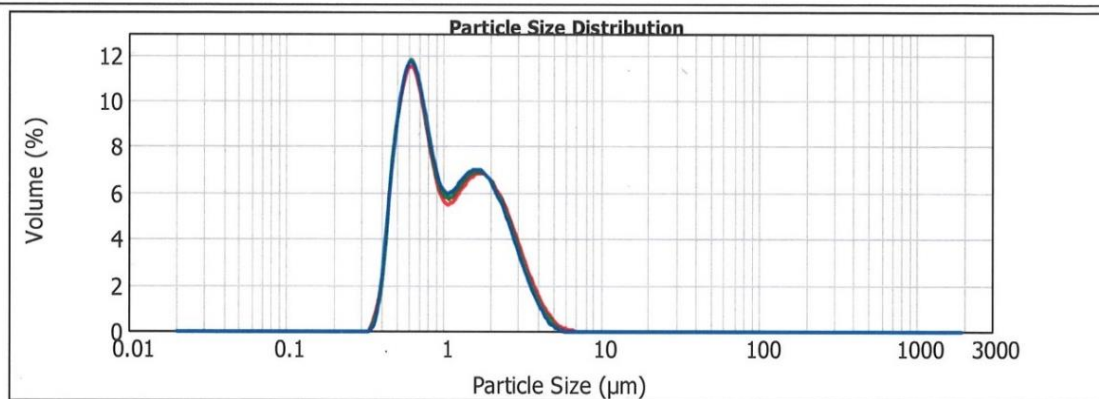
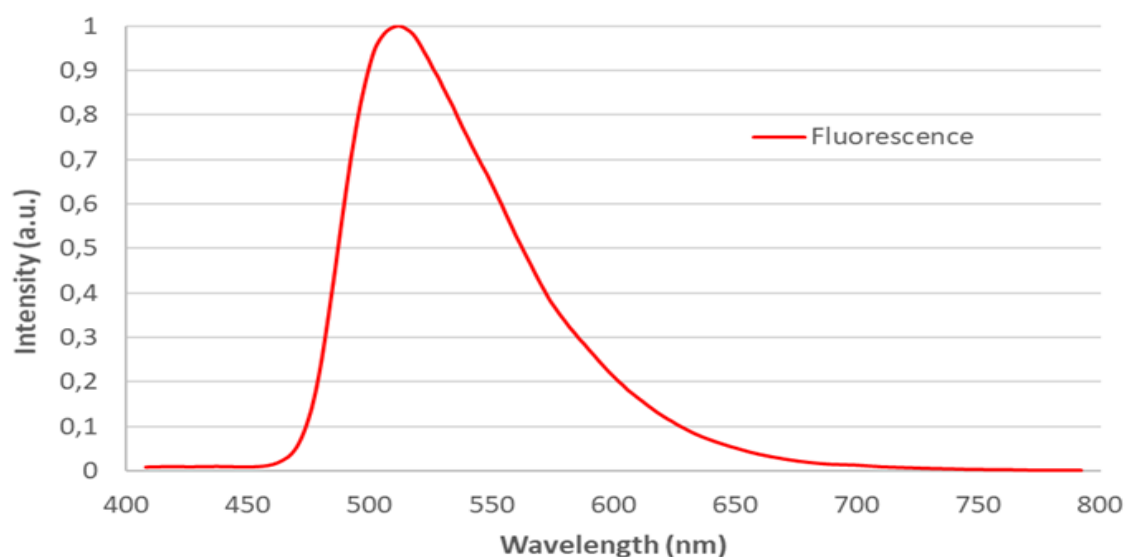
10 gram of dry pigment is mixed with 500 ml HCl or NaOH solution (5% in case of organic and 1% in case of inorganic pigment). After 1 hour, the pigment slurry is filtered and washed to a neutral pH. The color difference is accessed on a draw down between the treated and untreated sample on a 1 to 5 scale. Scale 1: considerable discoloration, scale 5: no discoloration.

Particle size distribution

d(0.1): 0.513 um

d(0.5): 0.957 um

d(0.9): 2.505 um


Fluorescence
 λ -max (5% in acrylic paint) = 519 nm (excitation at 350 nm)


Disclaimer: Our technical advice, information, statements, whether given verbally, in writing, or in the form of test results, is offered for your guidance without warranty. No warranty for fitness for a particular purpose is made. This also applies where protective rights of third parties are involved. It does not release the user from obligation to test the suitability of the products and formulas for the intended process and applications. Our guarantee is limited to the consistent quality of our product.